




JTZ-501
JTZ-501P(Optional)

Why is Jingtai Security Fog Generator the best use security budget:

- Global-First solid dry fog with food-grade, cold smoke technology, environmentally friendly, no any harmless to humans and animals; it will not affect clothing, furnishings and electrical equipment surrounding.
- Fog formula container Easily replace and refilled.
- non - corrosive, non - residue, and biodegradable, ultra-low power consumption.
- Protects property at least 45 minutes after intrusion.
- Support Multiple startup modes, seamless integration with existing electronic alarm systems.
- Easy to install, maintenance free.
- passed the toxicology test of the PLA institute of disease prevention and control, and passed the product quality test of the ministry of public security safety.

Color Available

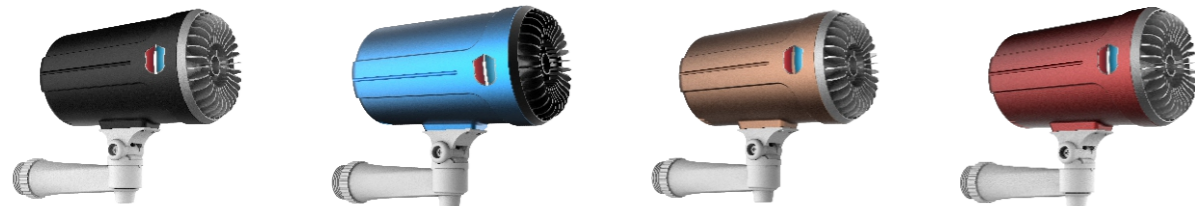


Application

- 3PCS fog container, 1 time use, which can fill 80-120 m3 area in 5-8 seconds.
- 1 second spray dense fog.
- 3 seconds protect key area.
- 5-8 seconds completely filled with 80-120 m3.
- Our security fog systems are installed for customers as Network alarm operation business: jewelry store, luxury stores, chain stores, supermarket, server rooms, bank, ATM's
- It will reduce on-site visibility to zero and actively prevent burglary/robbery in seconds in case of emergency.


SPECIFICATION

Fog formula	2PCS fog formula in one container(JTZ-501) 3PCS fog formula in one container(JTZ-501P)
Fog Container Quantity	3PCS Fog container, 1 time ejection
Refill	easily replaced and refilled
Fog Made Formula	Solid food-grade
Protection Area	80m3-120m3 Closed Area
Fog Generator	Cold Smoke Technology
Time of Duration	30-45 minutes
Startup Mode	Support button switch, Remote controller Remote monitoring center
Power Source:	DC12V, 1.5A
Startup Time	1 second
Full of Fog Time	5 seconds
Power Consumption	18W
Dimensions:	168*101(mm)
Color	Silver,gray,black
Weight	1.7KG
Casing	Aluminium
Working Temperature	-10°C~50°C
Operating Humidity	-10%~85%
Installation:	Bracket Wall Mounting

Security Fog physical Diagram

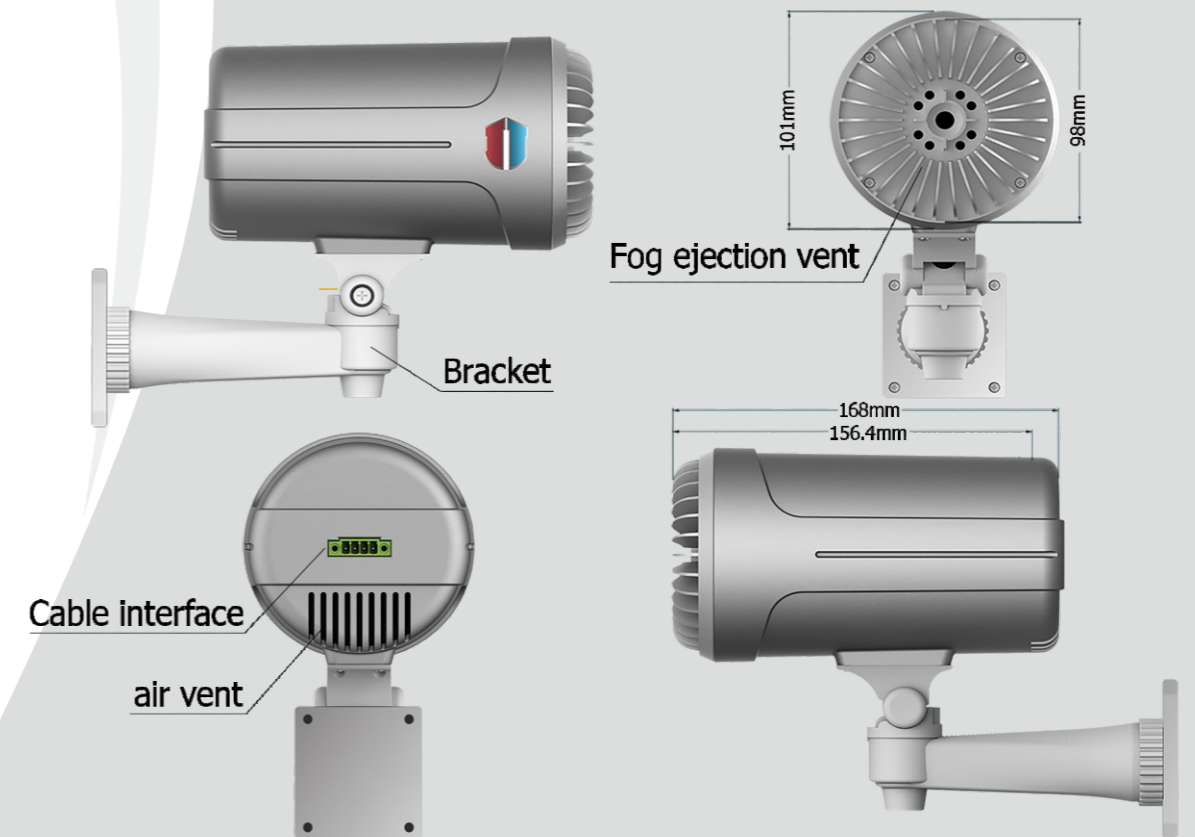

Multiple Startup Mode

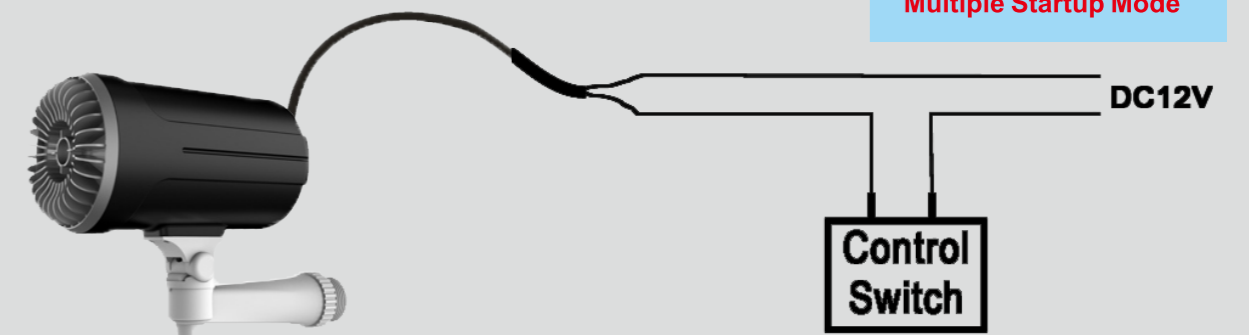

Jingtai Fog Generator can be triggered by POWER 12V/4A

1. Manual activate, triggered by panic button.
2. Manual remote control. triggered by Internet monitoring center system.
3. Automatic activate, triggered by controller, sensor, alarm etc.